



BITSTREAM®

Leader of time synchronization and data transmission solutions



Time server QUAZAR-200

*Precise time synchronization
in an industrial environment*



Solid



Easy
to configure



Guaranteeing time
synchronization



Precise

QUAZAR-200 - *industrial time server*

Industrial Time Server with TE PTP monitoring function synchronized by GNSS module, equipped with 4-port 10 Gigabit Ethernet switch and optional 8x 10M/100M/1G RJ45 or 8x 100M/1G SFP interfaces

- ✓ Managed time server for network synchronization equipped with interfaces of 4 SFP+ 1/2.5/10Gbps slots and 1x RJ45 10/100/1000Mbps ports; 1x PPS IN; 1 PPS OUT; 1x 10MHz IN/10MHz OUT; 1 x E1 G703/G.704; 1x ToD IN/ToD OUT optionally equipped with additional interfaces of 8x (10M/100M/1G) RJ45 or 8x 100M/1G SFP
- ✓ Supported synchronization protocols PTPv.2, NTP, SNTP, ToD, SSM, SyncE,
- ✓ Supported PTP profiles: PTPv2 default IEEE 1588; ITU-T G.8275.1; ITU-T G.8275.2; ITU-T G.8265.1; IEC 61850-9-3; IEEE C37.238-2011 and 2017
- ✓ Passive Slave function enabling basic Time Error PTP monitoring with a GNSS receiver as reference and with data transfer to the QUAZARNET application.
- ✓ GNSS PPS signal precision: $\pm 40\text{ns}$ (Clear sky),
- ✓ Mutisystem receiver for GPS, Gallileo, Glonass, Beidou systems
- ✓ Additional NMI UTP RJ45 10/100Mbit/s management port
- ✓ Support for STP, RSTP and MSTP protocols.
- ✓ ITU-T G.8032 ERPS support, connection reconfiguration in $<20\text{ms}$, up to 64 rings simultaneously
- ✓ IEEE 1588-2008v.2 (PTPv2) standard: precision time synchronization protocol, hardware time stamping with 1588 profile
- ✓ Energy Saving with Energy Efficient Ethernet (EEE).
- ✓ Support for PROFINET Conformance Class A protocol
- ✓ Ethernet OAM support (Link OAM and Service OAM)
- ✓ DDMI - SFP module monitoring function
- ✓ Standardly equipped with a measurement interface monitoring the quality of the G703/G.704 clock
- ✓ Standard equipped with I/O functions: interface 4 inputs and 2 outputs 'cc' for monitoring, alarms and control purposes
- ✓ Management IPv4, IPv6, Web, telnet, SSH and console, SNMP v1,2,3
- ✓ Access security SNMPv3, HTTPS, SSH and IEEE802.1x, Radius, Tacacs+ - AAA
- ✓ Switch designed in accordance with the requirements of IEC61850-3, IEEE1613 standards for substations
- ✓ Operating temperature: -40 to $+85^{\circ}\text{C}$ when conditions are met
- ✓ Rugged metal housing for DIN rail mounting
- ✓ Power supply 36-60 VDC or 80-360 VDC/75-270 V AC

Optional features under the license

- ✓ Extension in IEEE 1588-2008v.2 (PTPv2) with Power Profile; synchronization for real-time applications in accordance with IEEE C37.238-2011, C37.238-2017; IEC61850-9-3,
- ✓ Synchronous Ethernet G.8261 (available on optical ports)



Features QUAZAR-200



Solid

QUAZAR-200 industrial time server is designed to meet the operation in extreme environmental conditions. We have made the device to meet the IEC61850-3, IEEE1613 standards for data transmission devices, in addition, we provide a guarantee of reliable operation at temperatures of -40° to $+85^{\circ}\text{C}$ with the conditions met.



Easy to configure

In creating the devices, BitStream could not forget to provide the user with intuitive and simple configuration. Thanks to the built-in HTTP server, SSH, RS232 console and SNMPv3 agent, configuration of the device's parameters can be done via a web browser or using the CLI command line.



Guaranteeing network synchronization

As standard, the device supports the IEEE1588v2 PTP protocol with the support of the G.8275.1 and default 1588 telecommunication profile. Thanks to the additional license, you can implement the Power Profile IEEE C37.238-2011, IEEE C37.238-2017, IEC61850-9-3, which will ensure precise time synchronization for applications in the energy sector with high demands on real-time operation, and thanks to the SYNCE license enabling the Synchronous Ethernet function, G.8261, ensuring precise synchronization of internal clocks of devices using frequency..



Precise

Quazar-200 time server is designed to guarantee high time precision. GNSS PPS signal precision: $\pm 40\text{ns}$ (Clear sky).



Safe

Security features such as https, SNMPv3, SSH allow you to configure and control access for your application. The implemented storm control mechanism will avoid unwanted traffic and network congestion.

Technical specifications

Supported transmission standards

- ✓ IEEE 802.3 10Base-T Ethernet
- ✓ IEEE 802.3u 100Base-TX Fast Ethernet
- ✓ IEEE 802.3u 100Base-FX Fast Ethernet Fiber
- ✓ IEEE 802.3ab 1000Base-T
- ✓ IEEE 802.3z Gigabit Fiber
- ✓ IEEE 802.3x Flow Control and Back-pressure
- ✓ IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
- ✓ IEEE 802.1p Class of Service (CoS)
- ✓ IEEE 802.1Q VLAN
- ✓ IEEE 802.1ad QinQ
- ✓ IEEE 802.1D- Spanning Tree Protocol (STP)
- ✓ IEEE 802.1D-2004 Rapid Spanning Tree Protocol (RSTP).
- ✓ IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
- ✓ IEEE 802.3ad Link Aggregation Protocol (LACP)
- ✓ IEEE 802.1x Port Based Network Access Protocol
- ✓ IEEE 802.3az EEE
- ✓ ITU K.44 - built-in secondary overvoltage protection on RJ-45 for transmission path, 4kV, 10/700us compliant: Resistibility tests for telecommunication equipment exposed to overvoltages and overcurrents - Basic Recommendation - only da version equipped with 8x RJ45 module (10M/100M/1G)
- ✓ Optional: Extension with Power Profile IEEE C37.238-2011, IEEE C37.238-2017, IEC 61850-9-3
- ✓ Optional: Synchronous Ethernet, G.8261: (Timing and synchronization aspects in packet networks)

Supported protocols

- ✓ IGMP v1, v2, v3, MLD v1, v2, GVRP,
- ✓ SNMP v1/v2c/v3, DHCP Client,
- ✓ NTP, SMTP, RMON,
- ✓ HTTP, HTTPS, Telnet, SSH v2, Syslog,
- ✓ EtherNet/IP, SNMP Inform, LLDP,
- ✓ IEEE 1588 PTPv2, Ipv6, NTP Client,
- ✓ MIB-II, Ethernet-Like MIB PROFINET Conformance Class A

Network synchronization

- ✓ The device is equipped with a TCXO on-board generator
- ✓ NTP protocol in server/client mode and SNTP
- ✓ IEEE 1588-2008 v2 PTP - standard support for synchronization with G.8275.1 or default 1588 telecommunications profiles in peer to peer, end to end and one step or two step modes
 - Time error for Master clock mode typically 40ns
 - Time error for BC (Boundary clock) mode typically < 200ns
 - Time error for BC (Boundary clock) mode with SyncE typically <100ns
 - Slave
- ✓ Optional synchronization with Power Profiles IEEE C37.238-2011, IEEE C37.238-2017 and Power Utility Profile IEC/IEEE 61850-9-3
- ✓ Optional, also Synchronous Ethernet, G.8261: (Timing and synchronization aspects in packet networks)

PTP monitoring in the network

- ✓ Passive Slave function enabling basic Time Error PTP monitoring with a GNSS receiver as reference
- ✓ QUAZARNET software – cooperation with a system supporting diagnostics, analysis and visualization of collected measurement data.

Time synchronization input/output interface module

- ✓ 1PPS (One Pulse Per Second) signal input/output
- ✓ 10Mhz clock signal input/output
- ✓ ToD (Time-of-Day) input/output - reconfigurable output to IRIG-B signal

GNSS receiver for clock synchronization

- ✓ 72 channel receiver compatible with GPS, GLONASS, BeiDou, Galileo systems
- ✓ Antenna input with SMA connector and support for active antennas
- ✓ GNSS receiver sensitivity: -167dBm/-159dBm with LNA option.
- ✓ GNSS PPS signal precision: +/-40ns (Clear sky)
- ✓ Can be equipped with stable on-board generators with different parameters:
 - OCXO generator with stability in the temperature range of -40 to +85°C of +/-20 ppb and holdover time of $\pm 1.5 \mu\text{s}$ at constant temperature for 0.5 hours
 - OCXO generator with stability in the temperature range of -40 to +85°C of +/-2 ppb and holdover time of $\pm 1.5 \mu\text{s}$ at constant temperature for 8 hours, within $\pm 8 \mu\text{s}$ at constant temperature for 12 hours,
 - OCXO generator with -40 to +85°C stability of +/-0.2 ppb and holdover time of $\pm 1.5 \mu\text{s}$ for a minimum of 72 hours
- ✓ Supports IEEE 1588 v2 Precision Time Protocol
- ✓ Supports G.8261 Synchronous Ethernet (SyncE)

Ethernet Interfaces

- ✓ Ethernet Connectors:
- ✓ 4 x 1G/2.5G/10Gbps SFP+ optional 8 RJ45 10/100/1000Mbps ports or 8x SFP 100M/1000M slots (100Mb/s speed on Optical Interface only works with optical SFP)
- ✓ Non-blocking switching matrix: 160Gbps
- ✓ QoS: Support for 8 physical queues, Weighted Round Robin algorithm and Strict Priority queuing. Priority settings based on: 802.1p PCP priorities, DSCP/ToS, port-based priority settings, TCP/UDP port number-based priority configuration capabilities
- ✓ VLANs: 4094 VLAN entries, 802.1Q, 802.1QinQ, private VLANs, VLAN translation.
- ✓ Flow Control: Flow Control - controls sent and received packets to prevent buffer overflow, i.e. data loss
- ✓ Storm protection: filtering for incoming traffic of Broadcast, Multicast, Unknown DA or all packets, outgoing traffic filtering for packets of all types, bandwidth limiting
- ✓ IGMP snooping: V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- ✓ Syslog - cooperation with the syslog server,
- ✓ Port Mirroring: Monitoring traffic on selected ports
- ✓ IEEE 802.3az: Energy Efficient Ethernet, reduced power consumption, 4 modes
- ✓ Security: HTTP/HTTPS, SSL/SSH, monitoring optical link parameter changes for violations, IEEE 802.1x Port Based Network Access Protocol, EAP, TACACS+, RADIUS authentication, authorization and accounting functions - AAA
- ✓ Port Trunk: IEEE 802.3ad LACP or static aggregation
- ✓ RMON, MIB II, Port mirroring, DNS, NTP, IEEE802.1ab LLDP, LLDP-MED

- ✓ MAC address table: up to 32k entries
- ✓ Optional L3 - static routing
- ✓ Network redundancy
 - ITU-T G.8032 Ethernet Ring (ERPS)
 - IEEE 802.1d - Spanning Tree (STP)
 - IEEE 802.1w - Rapid Spanning Tree Protocol (RSTP)
 - IEEE 802.1s - Multiple Spanning Tree Protocol (MSTP)

I/O interface - inputs

- ✓ Number of inputs - 4
- ✓ Input type - digital, potential-free
- ✓ Connector: screwed

I/O interface - outputs

- ✓ Number of outputs - 2
- ✓ Type of outputs - relay NO/NC
- ✓ Maximum switching current - 0.5A 60VDC with resistive load
- ✓ Connector: screwed

Device start time

- ✓ Fully operational after a cold start after 30 seconds maximum. Takeoff time does not include synchronization with GNSS systems.

MTBF

- ✓ Time : 650000 hrs.
- ✓ Standard : Telecordia , SR-332

Management

- ✓ IPv4, IPv6, ARP, ICMP, TCP, UDP, DNS
- ✓ SSH, http, https, SNMP v1/v2c/v3
- ✓ Local (Ethernet/RS-232) and remote CLI
- ✓ System log of events and alarms
- ✓ "Privilege level" - Privilege level configuration - read/write, configured independently for multiple users w

Power supply

- ✓ DC 36-60V power supply
- ✓ Power supply DC 80-350V; AC 75-240V
- ✓ Screw connector for AC or DC power supply
- ✓ Total power consumption - <40W

Physical characteristics

- ✓ DIN rail or free-standing mounting
- ✓ Dimensions [141 mm or 183x135x120] mm
- ✓ Metal casing
- ✓ Weight up to 2.5kg

Environmental requirements


- ✓ Operating temperature: -40 to +85°C with a minimum airflow of 0.4m/sec.
- ✓ Operating temperature: -40 to +70°C with a minimum airflow of 0.0m/sec.
- ✓ Operating time at a maximum temperature of +85°C is up to 16 hours
- ✓ Standard ambient humidity during operation: 0 to 95 percent (non-condensing),
- ✓ Location type: class C according to EN 60870-2-2 - sheltered locations
- ✓ Degree of protection according to IP-30

Supported standards, recommendations and directives EMC, safety*


EN 55032:2015-09	Electromagnetic compatibility of multimedia devices	<i>Emission requirements.</i>
EN 55024:2011	Electromagnetic compatibility of multimedia devices	Resistance requirements
EN 60825-1:2014-11	Safety of laser devices	Part 1: Equipment classification and requirements.
EN IEC 62368-1:2020-11	Audio/visual, information technology and telecommunications equipment	Part 1: Safety requirements
EMC 2014/30/EU	EMC Electromagnetic Compatibility Directive.	
LVD 2014/35/EU	LVD Low Voltage Directive.	
IEC 61000-4-2	Electromagnetic compatibility (EMC)	Part 4-2: Test and measurement methods - Test of resistance to electrostatic discharge
IEC 61000-4-3	Electromagnetic compatibility (EMC)	Part 4-3: Test and measurement methods - RF radiated electromagnetic field immunity test
IEC 61000-4-4	Electromagnetic compatibility (EMC)	Part 4-4: Test of resistance to a series of fast electrical transients
IEC 61000-4-5	Electromagnetic compatibility (EMC)	Part 4-5: Test and measurement methods - Impact resistance testing
IEC 61000-4-6	Electromagnetic compatibility (EMC)	Part 4-6: Test and measurement methods -- Testing for immunity to conducted disturbances induced by radio frequency fields
IEC 61000-4-8	Electromagnetic compatibility (EMC)	Part 4-8: Testing for immunity to mains frequency magnetic fields
IEC 61000-4-11	Electromagnetic compatibility (EMC)	Part 4-11: Tests for resistance to voltage drops, short interruptions and voltage changes
IEC 61000-4-12	Electromagnetic compatibility (EMC)	Part 4-12: Test and measurement methods -- Test of resistance to damped sinusoidal waveforms
IEC 61000-4-29	Electromagnetic compatibility (EMC)	Part 4-29: Testing for immunity to voltage dips, short interruptions and voltage changes at the DC power connection

* - The scope and list of supported standards may change as the device evolves.

Mechanical drawing

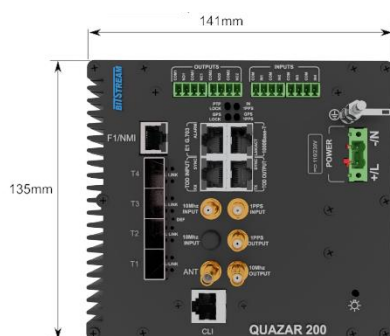

View - front

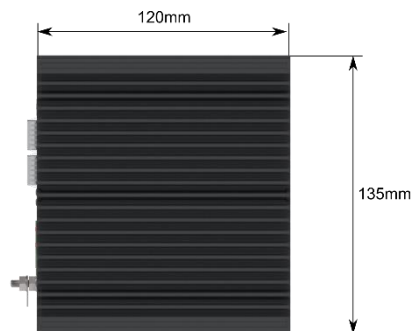

View - side

Product code

QUAZAR-200-Y-(L)-R-(K)-U

QUAZAR-200	Y	(L)	R	(K)	U
4x SFP / SFP+ (1G/2.5G/10G) + GNSS receiver	5				
8x RJ45 (10M/100M/1G) + 4x SFP/SFP+ (1G/2.5G/10G) + GNSS receiver	6				
8x SFP (100M/1G) + 4x SFP/SFP+ (1G/2.5G/10G) + GNSS receiver	7				
Routing functionality					
static routing		L3			
GNSS receiver module versions					
GNSS receiver with antenna input and OCXO generator with ± 20 ppb stability with sustained stability for a minimum of 0.5 hours			GPS1OCXO-L		
GNSS receiver with antenna input and OCXO generator with ± 1 ppb stability with sustained stability for a minimum of 8 hours			GPS1OCXO-M		
GNSS receiver with antenna input and OCXO generator with ± 0.2 ppb stability with sustained stability for a minimum of 72 hours			GPS1OCXO-H		
Additional features					
Standard built-in secondary 4kV 10/700 μ s ITU K.44 surge protection on RJ-45 ports for the transmission path				K ¹	
Power supply					
Power range: 36-60VDC,					7
Power range: 80-350V DC, 75-240VAC					C

1- option available only for version equipped with 8x RJ45 module (10M/100M/1G)

Additional accessories

Designation	Transmission speed	Wavelength	Fiber optic type	Distance	Insert type	Connector type	Operating temperature	Comments
BTPP-85192-SRT	10 Gbps	850 nm	MM	300 m	SFP+	LC	-40~80 °C	---
BTPP-31192-LRT	10 Gbps	1310 nm	SM	10 km	SFP+	LC	-40~80 °C	
BTP-8524-S5TD	1.25 Gbps	850 nm	MM	550 m	SFP	LC	40~85 °C	
BTP-3124-L2TD	1.25 Gbps	1310 nm	MM/SM	2/20 km	SFP	LC	40~85 °C	
BTE-GB-PIRT	10/100/1000 Mbps	100m (UTP-5)	---		Copper SFP	RJ-45	40~85 °C	

List of proposed power supplies for BITSTREAM devices

Designation of the power supply	Output voltage range	Nominal output power	Number of ports with PoE (15W)	Number of ports with PoE+ (30W)	Number of ports with PoE++ (60W)	Number of ports with PoE++ (90W)	Operating temperature C-standard T-industrial	Comments
	DC	W						
ZAS-48V56-60-R-T	48 - 56 V	60	3	1	0	0	-20°C ~ +70°C	
ZAS-48V55-120-R-T	48 - 55 V	120	6	3	1	1	-20°C ~ +70°C	
ZAS-48V55-240-R-T	47 - 56 V	240	13	6	3	2	-20°C ~ +70°C	
ZAS-48V55-480-R-T	47 - 56 V	480	30	14	7	4	-20°C ~ +70°C	
ZAS-48V55-960-R-T	48 - 55 V	960	60	30	15	8	-20°C ~ +70°C	

Legend of designations: W - plug-in; S - standalone; R - for DIN rail.

Overview of licenses that extend the capabilities of the QUAZAR-200

SYNCE LICENSE - Synchronous Ethernet G.8261 - a license to add Synchronous Ethernet G.8261 (Timing and synchronization aspects in packet networks) functionality on optical ports, providing precise synchronization of internal clocks of devices using frequencies for energy applications, among others.

PTP SYNCHRONIZATION LICENSE with POWER PROFILE - License to extend in IEEE1588 PTPv2 protocol with POWER PROFILE - IEEE C37.238-2011, IEEE C37.238-2017 and IEC61850-9-3 for precise time synchronization among other applications in the power industry.

LICENSE 1P1T - license to expand the GNSS module with an additional output 1x input and 1x output 1PPS output, 1x output and 1x output 10Mhz solution, 1x output and 1x output TOD (Time-of-Day) output; from the update of the IEEE 1588 v2 Precision Time Protocol and SynCE,



BitStream S.A.

Melgiewska St. 7/9

20-209 Lublin, Poland

Vat: 946-250-85-88

Tel. +48 81743 86 43

Fax +48 442 02 98

info@bitstream.pl

www.bitstream.pl/en



All rights reserved.
Specifications may
change during
development.

